## BASICS

**Speaker type:** 3-way

Cabinet: 20/34 x 25/36 x 105 cm, WxDxH (pyramid)

System sensitivity: 88 dB/2.8V/1 meter.

Impedance: 4-8 Ohms.

**Power requirement:** 20+ watts/channel


# JANTZEN AUDIO Ellipticor 2F8 (Passive)

#### Designed by Troels Gravesen

Page 1: Crossover component overview

Page 2: Damping materials and accessories overview

### **Crossover component overview:**

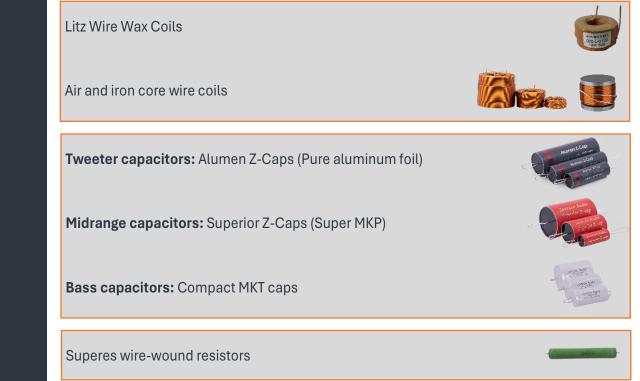

#### Damping materials included:

Grey damping felt White polyester damping cloth

Combed natural wool stuffing



# **Accessories included:** Binding post terminals (4 pairs) Port tubes (bass reflex) Straight port parts (bass reflex) 16 AWG PFTE insulated silver infused cables (for internal wiring) Solder tag strips (28-pin) a Brance and Brance Bran CasCo SuperFix glue (for gluing components to boards) SuperFix Black anodized woods screws (for driver mounting)