

Faital 3WC 15" (Beryllium)

Designed by Troels Gravesen

Page 1: Crossover component overview

Page 2: Damping materials and accessories overview

BASICS

Speaker type:

3-way

Cabinet:

45 x 42 x 96 cm, WxDxH.

System sensitivity:

95-96 dB/2.8V/1 meter.

Impedance:

4-8 Ohms.

Minimum 4.6 Ohms.

Power requirement:

20+ watts/channel

Crossover component overview:

Litz Wire Wax Coils


Air and iron core wire coils



Tweeter capacitors: Alumen Z-Caps (Pure aluminum foil)

Midrange capacitors: Silver Z-Caps (Super MKP)

Bass capacitors: Compact MKT caps

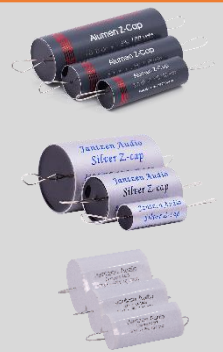

Superes wire-wound resistors



Damping materials included:

Grey damping felt



White polyester damping cloth



Combed natural wool stuffing



Accessories included:

Binding post terminals (4 pairs)



Straight port pipes (bass reflex)




16 AWG PTFE insulated silver infused cables (for internal wiring)



Solder tag strips (28-pin)



CasCo SuperFix glue (for gluing components to boards)



Black anodized woods screws (for driver mounting)

